


DasKlug

Powered by

HEROApps

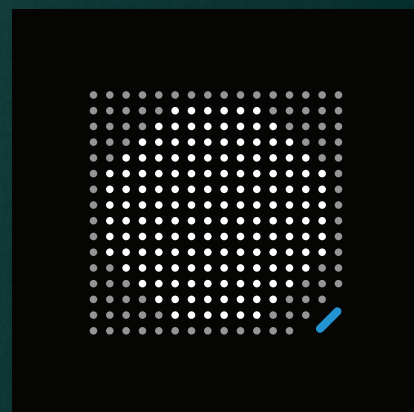

DKBL01VC01NN

Smart Bell

Data Sheet



Technical Specification

General Specification

Features	Deatils
Communication	RS485
Technology	Modbus RTU
Volt	12-24V DC Class 2
Service life span	upto 1 million touch times
Working temperature	10 to 60C
Working humidity	10-95% RH
Type	LED touch
Size	86 x 86 mm for 1-6 buttons 86 x 105 mm for 8 buttons
Material	4mm tempered glass
Speaker	Multiple sound choices


Product Structure




Installation

Install Control Panel


⚠ Please do not disassemble or install violently to cause damage. We would assume no responsibility.




1. Connect wires according to wiring diagram.




2. Open product from snap joint.




3. Put product in installation box.



4. Tighten the installation screws.




5. Snap the faceplate from top to bottom.



6. The installation is completed.

Dimensions Cutout

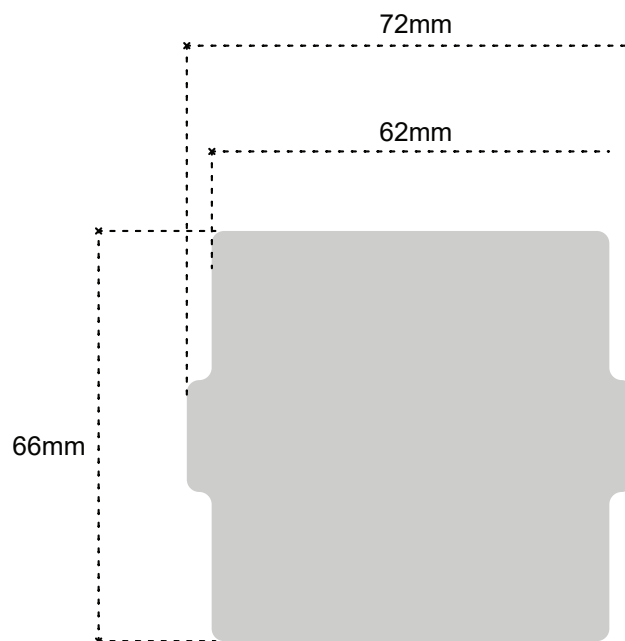



Disclaimer

The information, specifications, and illustrations contained in this document are provided for reference purposes only and are subject to change without prior notice. DasKlug reserves the right to modify product design, features, technical data, or functionality at any time as part of continuous improvement efforts, without any obligation to update previously issued documentation.

All performance values are based on internal testing under standard conditions. Actual results may vary depending on installation environment, integration methods, firmware versions, third-party systems, and user configurations.

DasKlug products must be installed, configured, and operated by qualified professionals in accordance with local electrical, safety, and regulatory standards. Improper installation or unauthorized modification may void product warranties.